


# POSTER LED DISPLAY

Digital LED Poster  
LED Banner

**PC SERVIS**

SERVIS IN PRODAJA RAČUNALNIŠKE OPREME

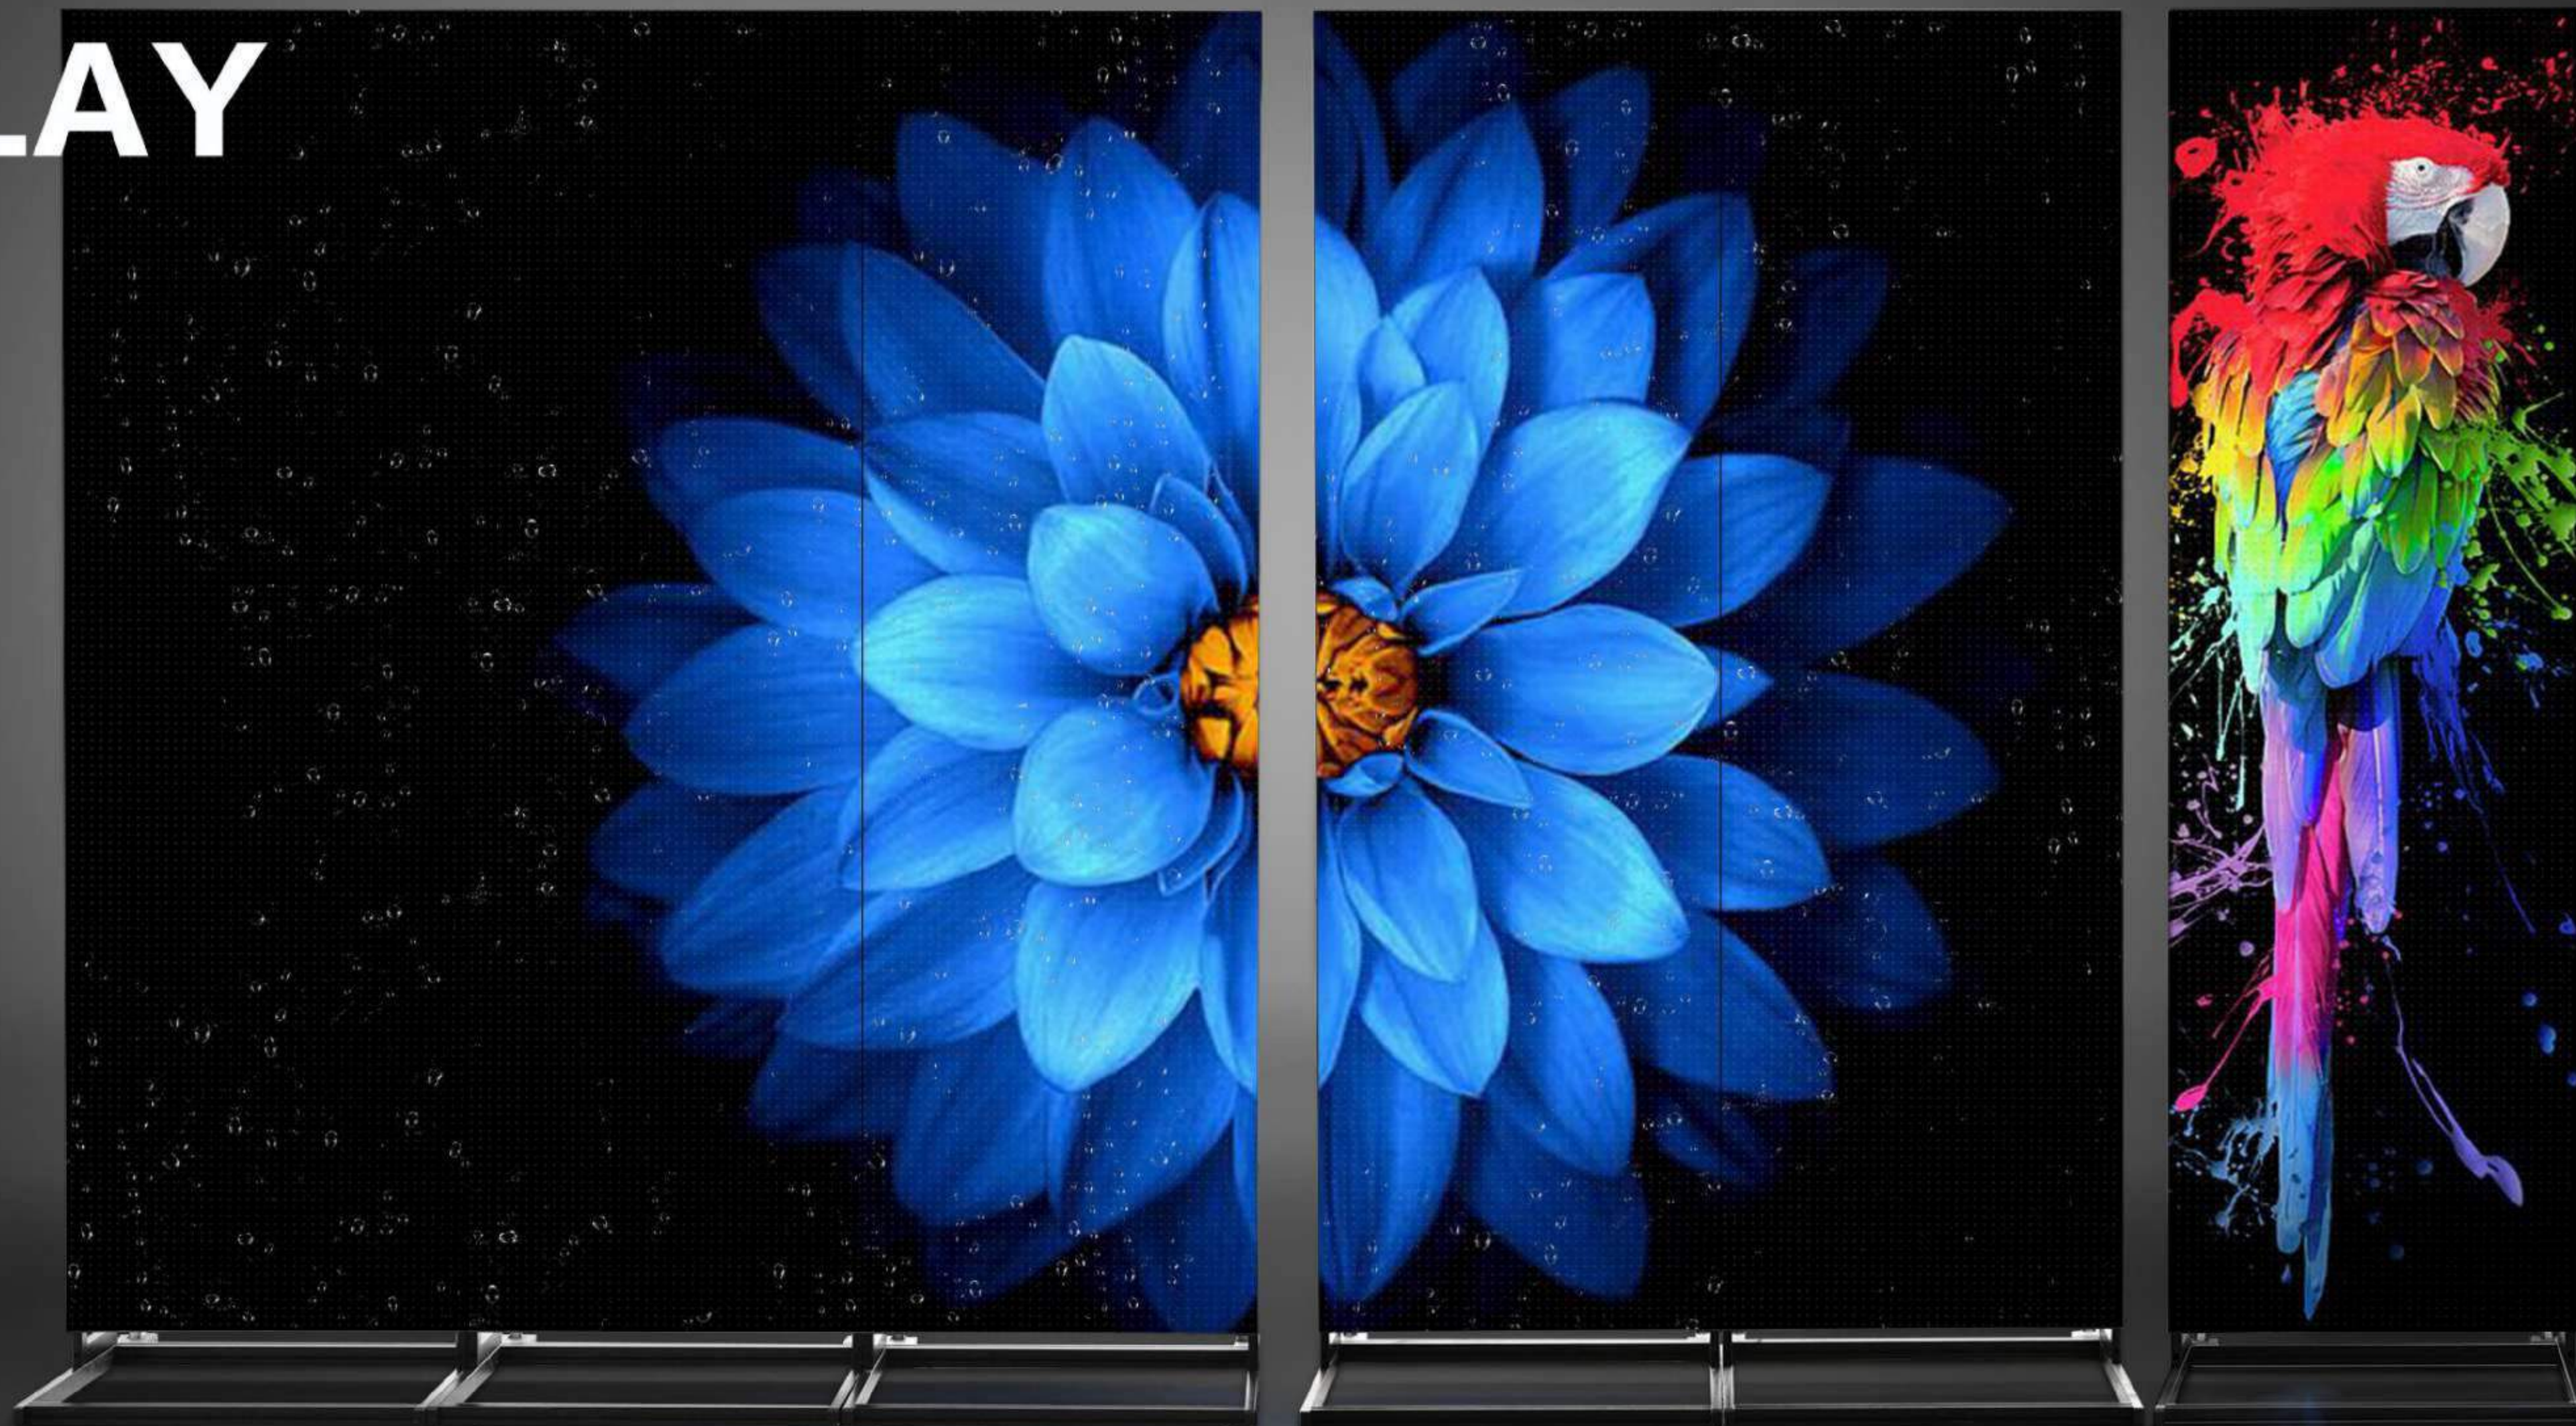





Integrate R&D, design, manufacturing, sales and service. ✓

Providing LED poster solutions with unique design and stable performance ✓

Light Weight & Ultra-thin Frame ✓

Smart Control & Multiple-unit Cascade ✓

Wide Applicability, Indoor and Outdoor Models Available ✓

Fast Delivery, in stock ready for shipment ✓



high temperature high humidity test


100%



For Europe

Full Series products has passed FCC/CE/ROHS/ISO Certificate.

100%  
aging test

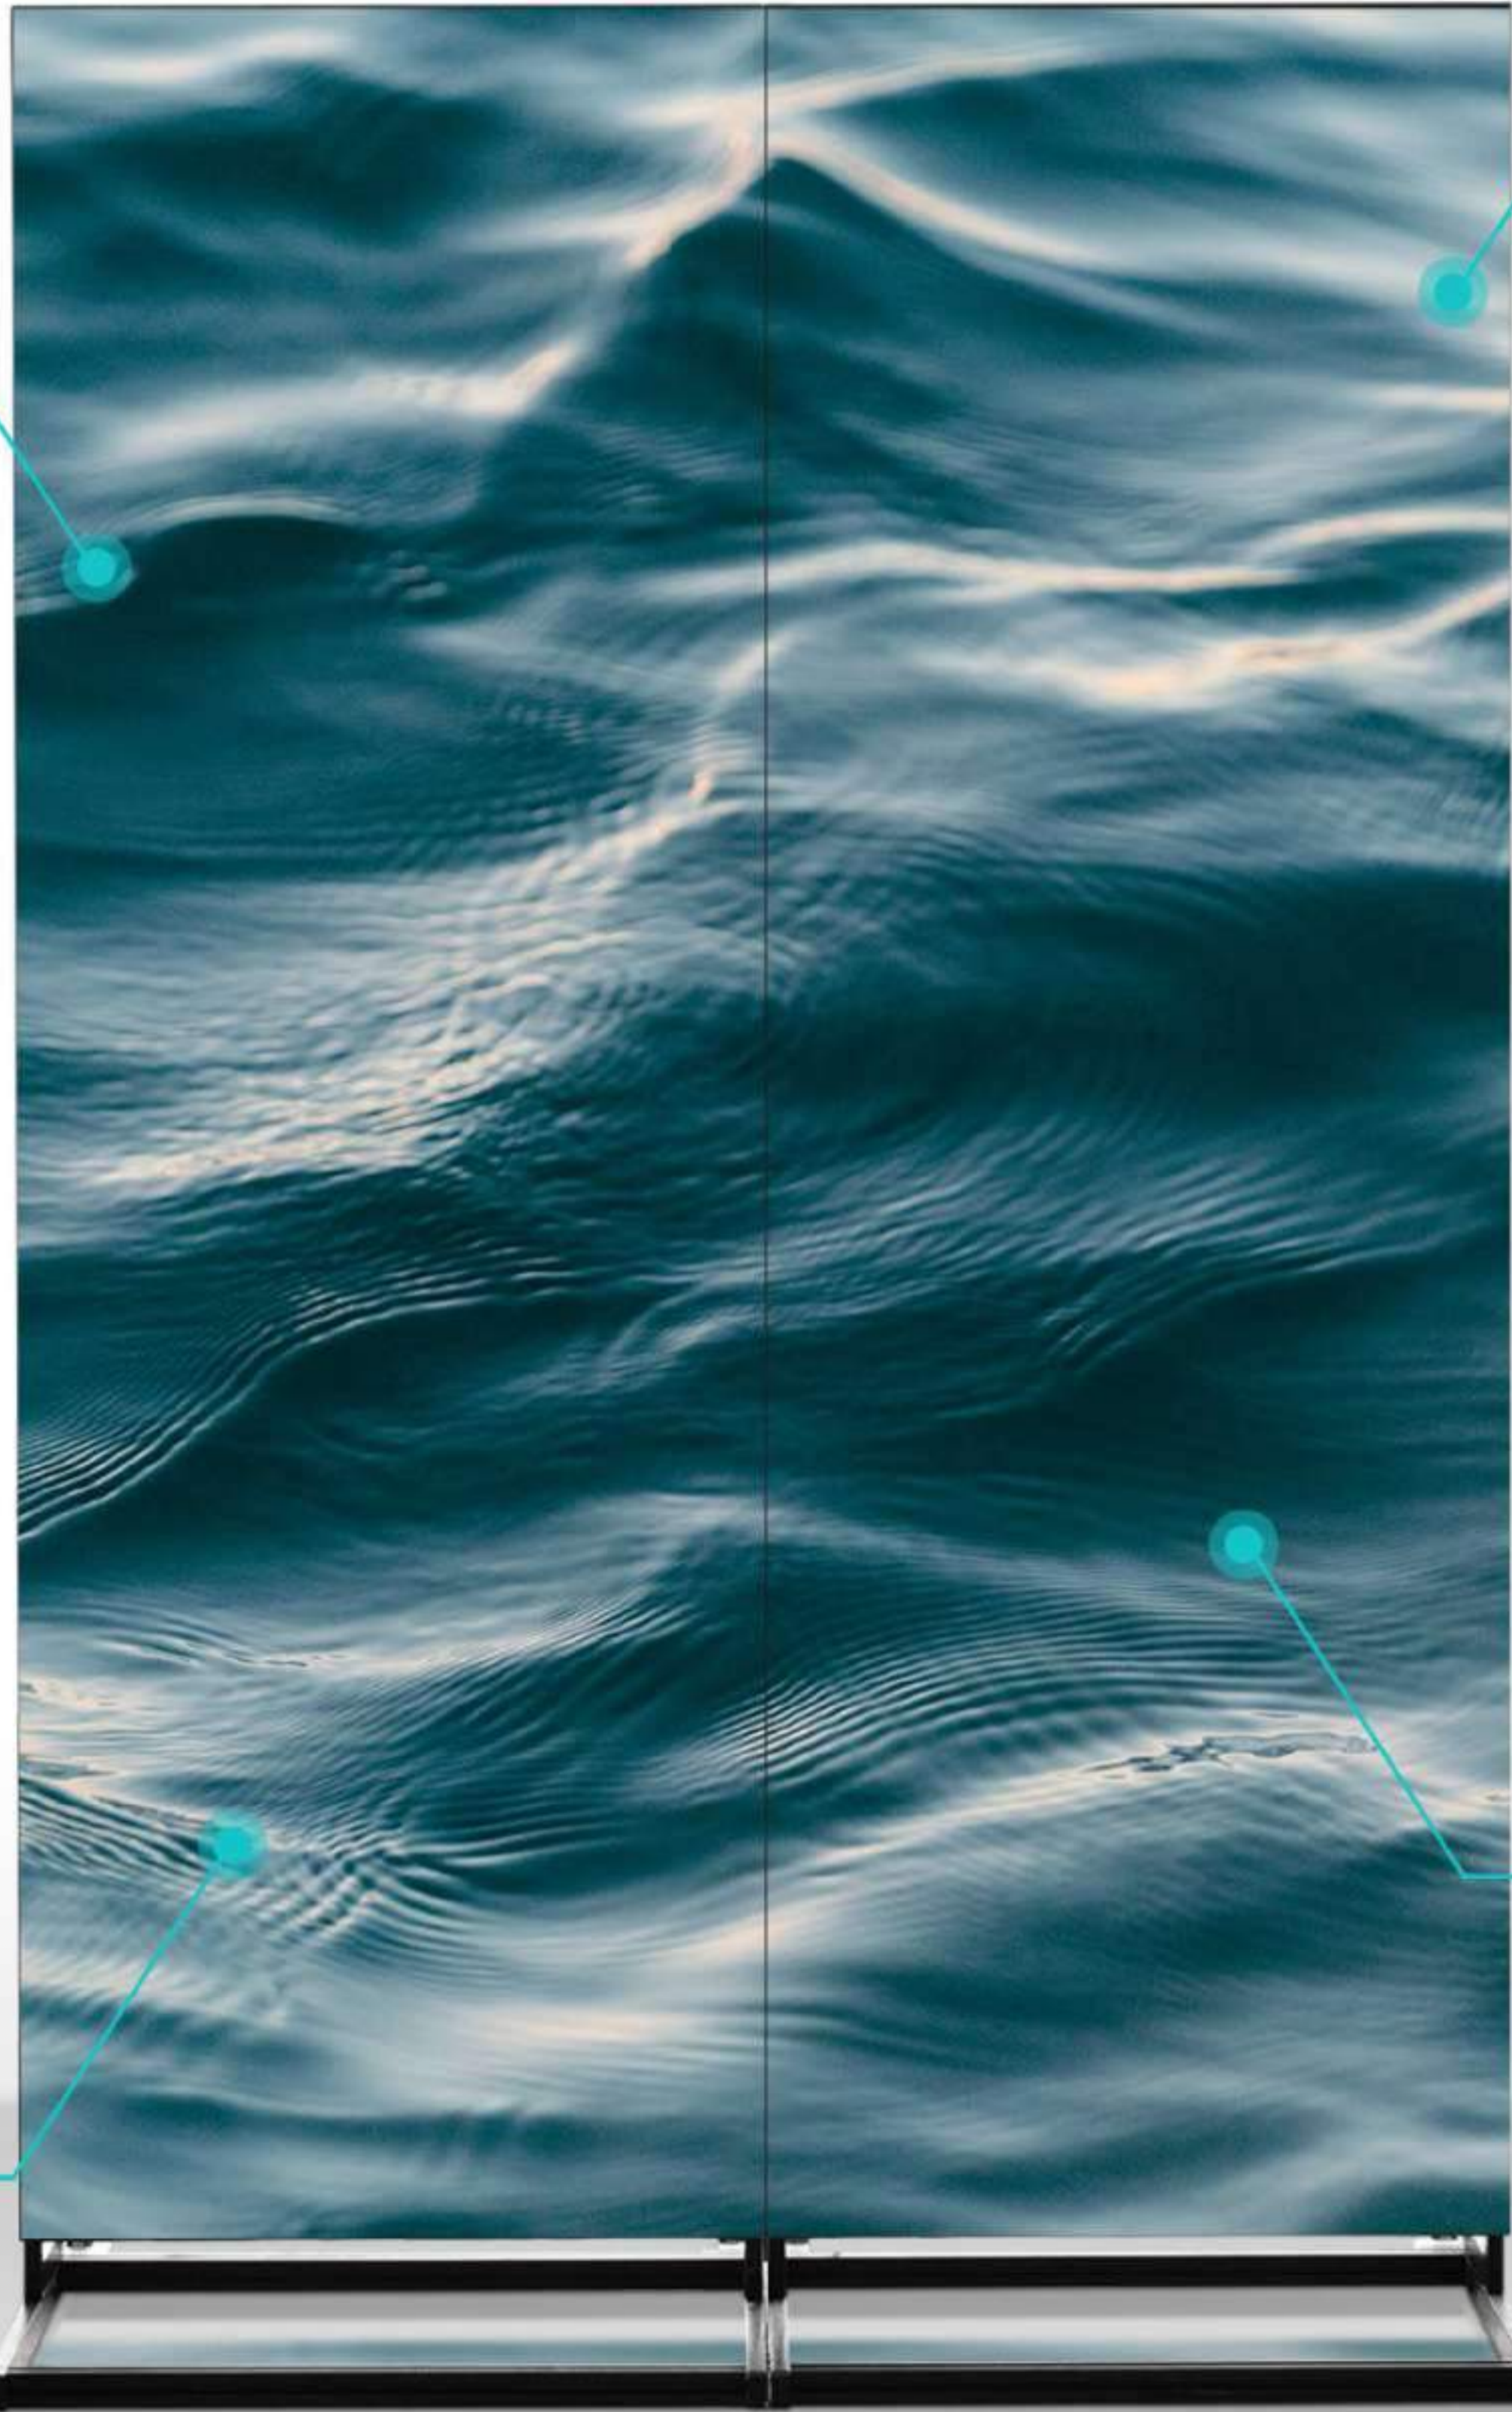

100%  
QC passed





For USA

100%  
vibration test





PC  
Screen6  
Screen1  
Input  
Output  
HDMI USB  
Power

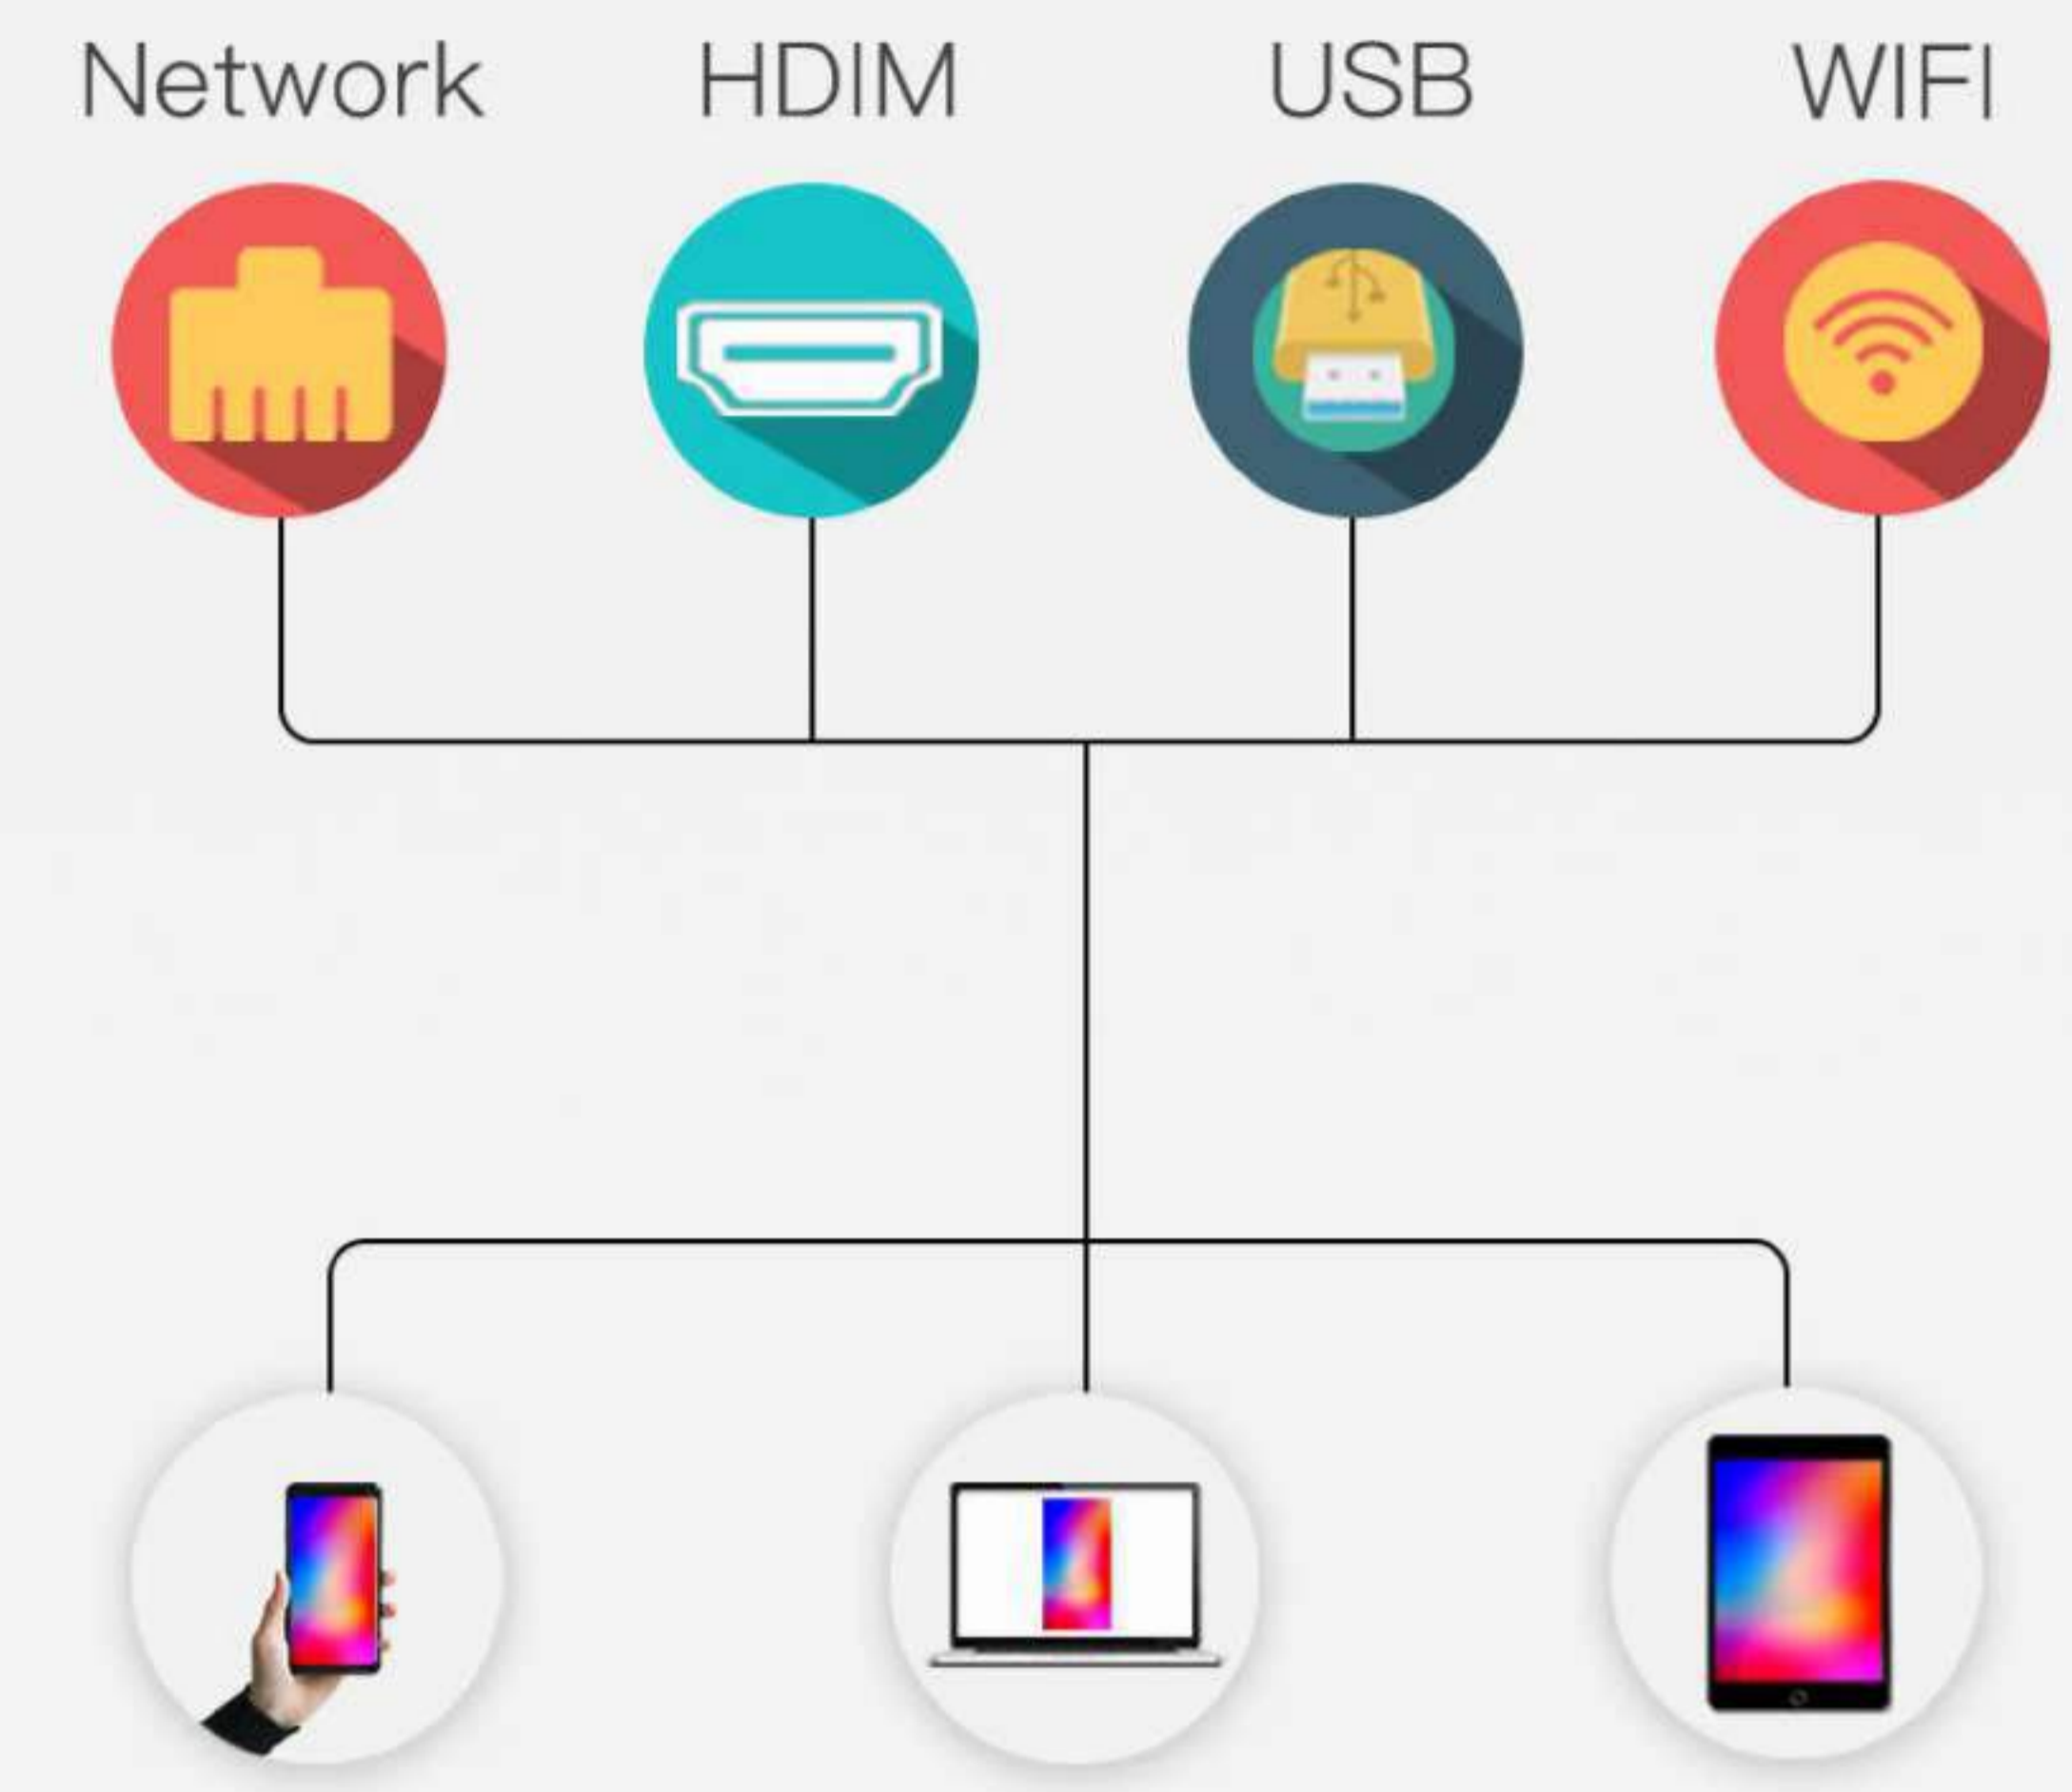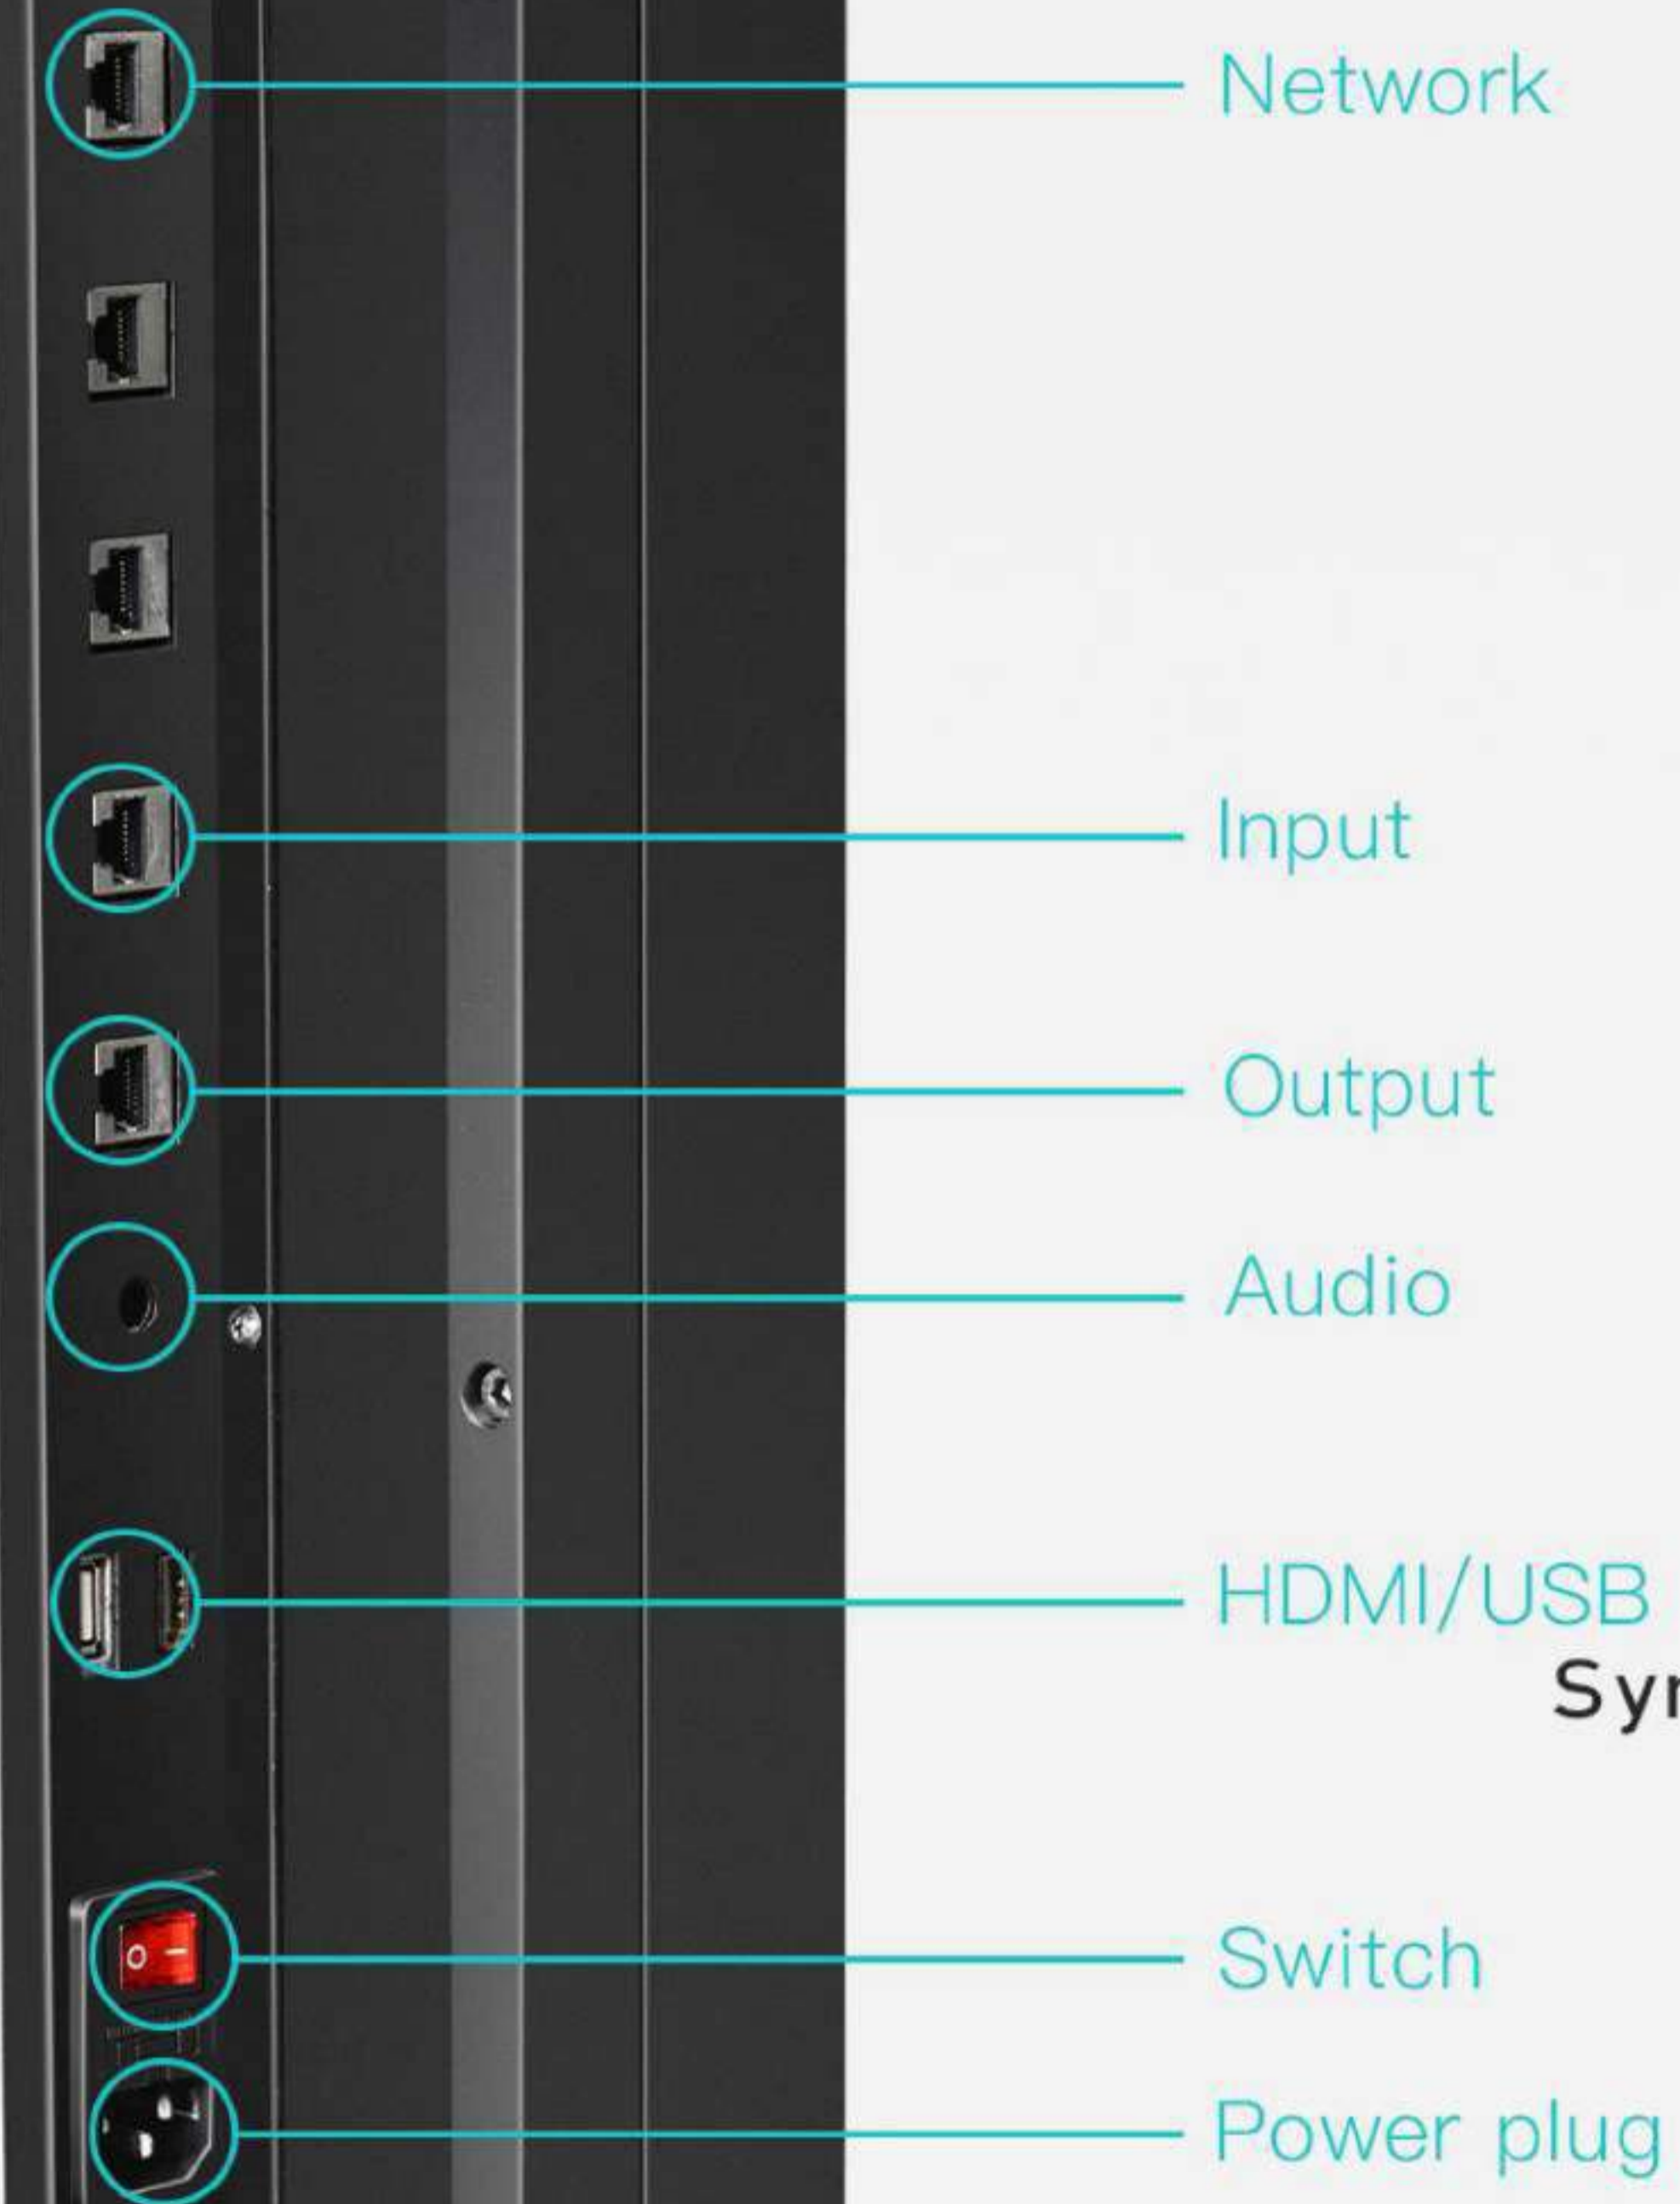

Synchronous & Asynchronous Dual-mode Media Player ✓

Real-time Zoom In And Out ✓

8 GB Memory ✓

Supports USB Expansion ✓

With HDMI Interface and Audio Port ✓



One device for multiple uses

Free-Standing ▼



Wall-Mounted ▼



Hanging ▼




Creative Stitching ▼






To help consumer better use the product.  
We especially made a guide video for clients.  
The guide file will be sent with the Portable led poster.

**Can automatically play video,  
pictures, text, and other programs.**

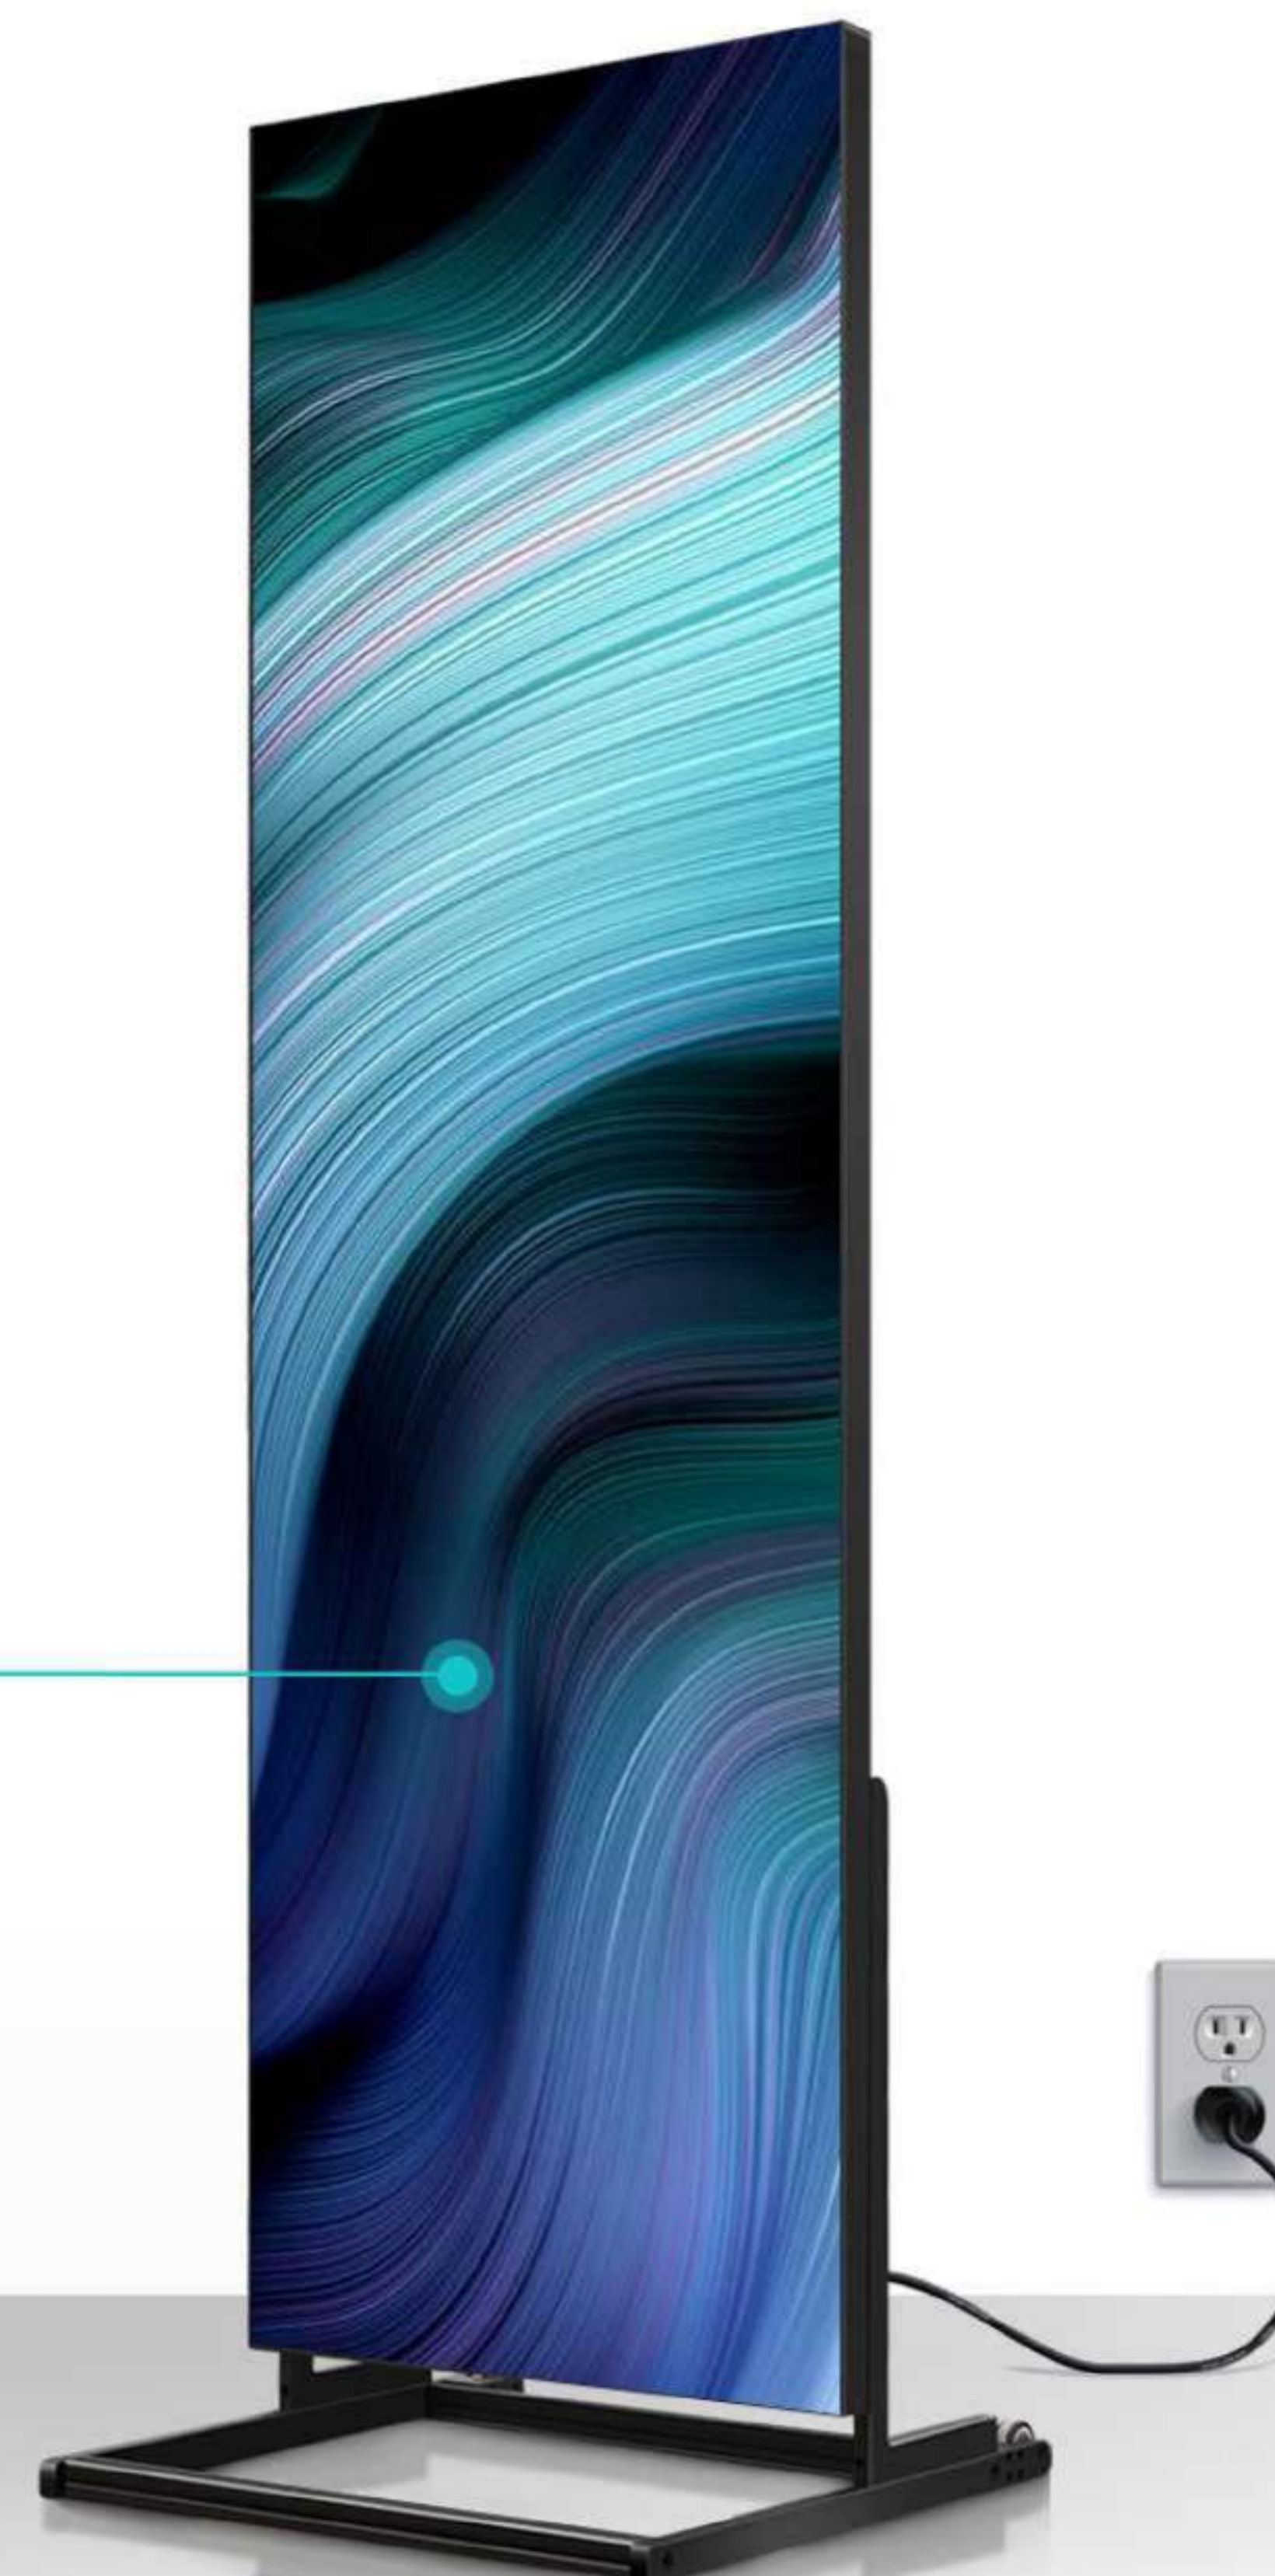



LIGHT WEIGHT ✓  
ULTRA-THIN FRAME ✓

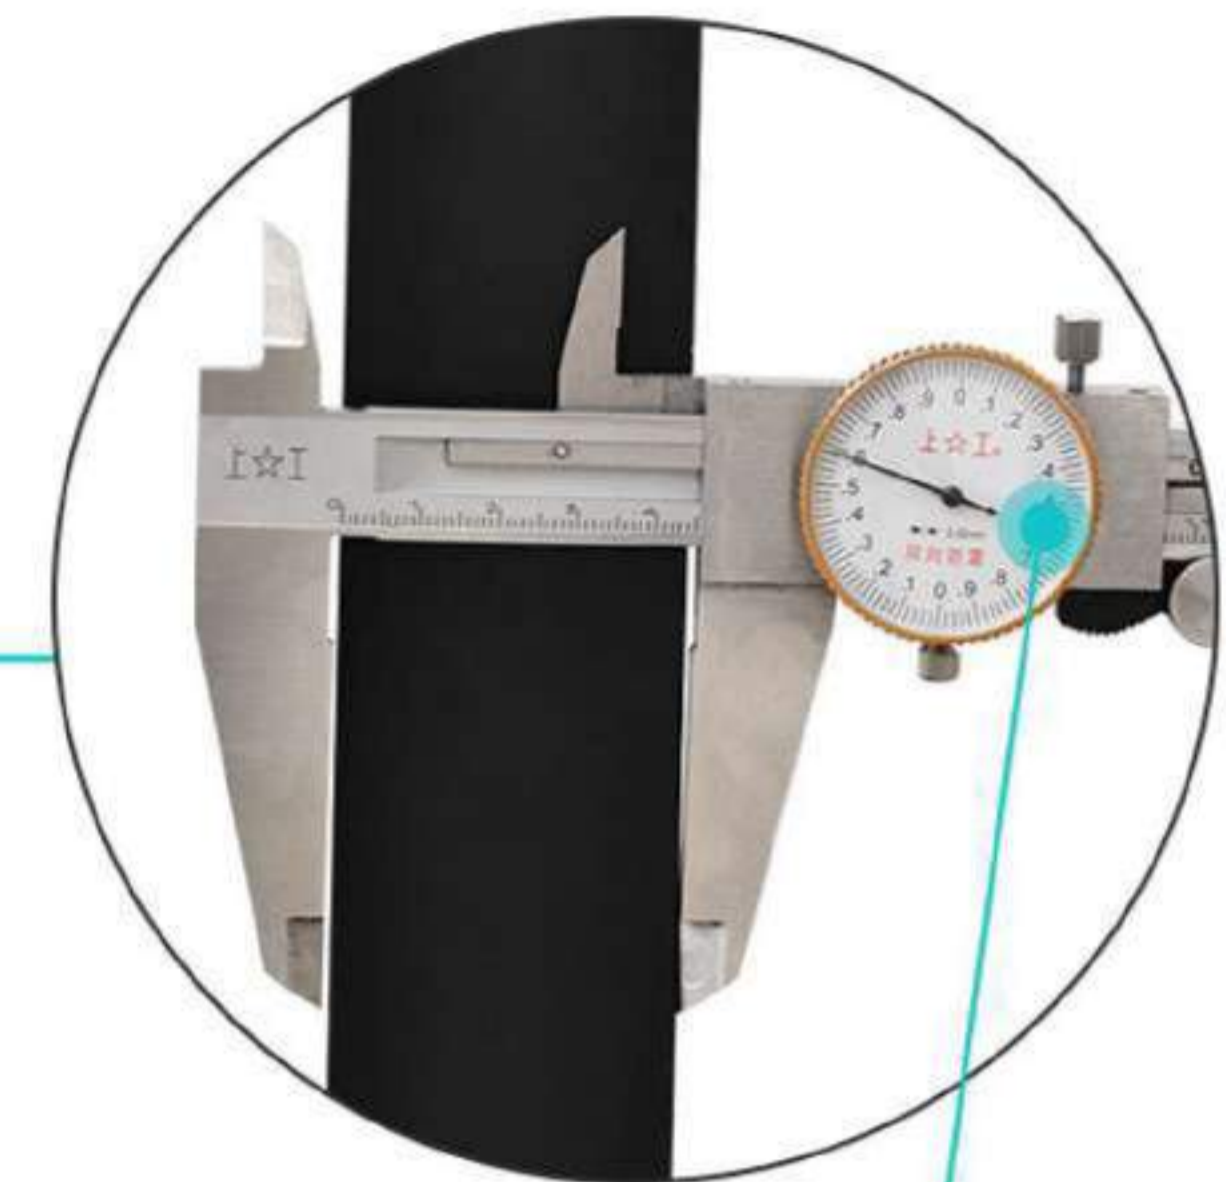

45mm

38kg



**PC SERVIS**

SERVIS IN PRODAJA RAČUNALNIŠKE OPREME


# MULTI-SCREEN SPLICING

MULTIPLE-UNIT SPLICING ✓

ULTRA-HIGH RESOLUTION ✓





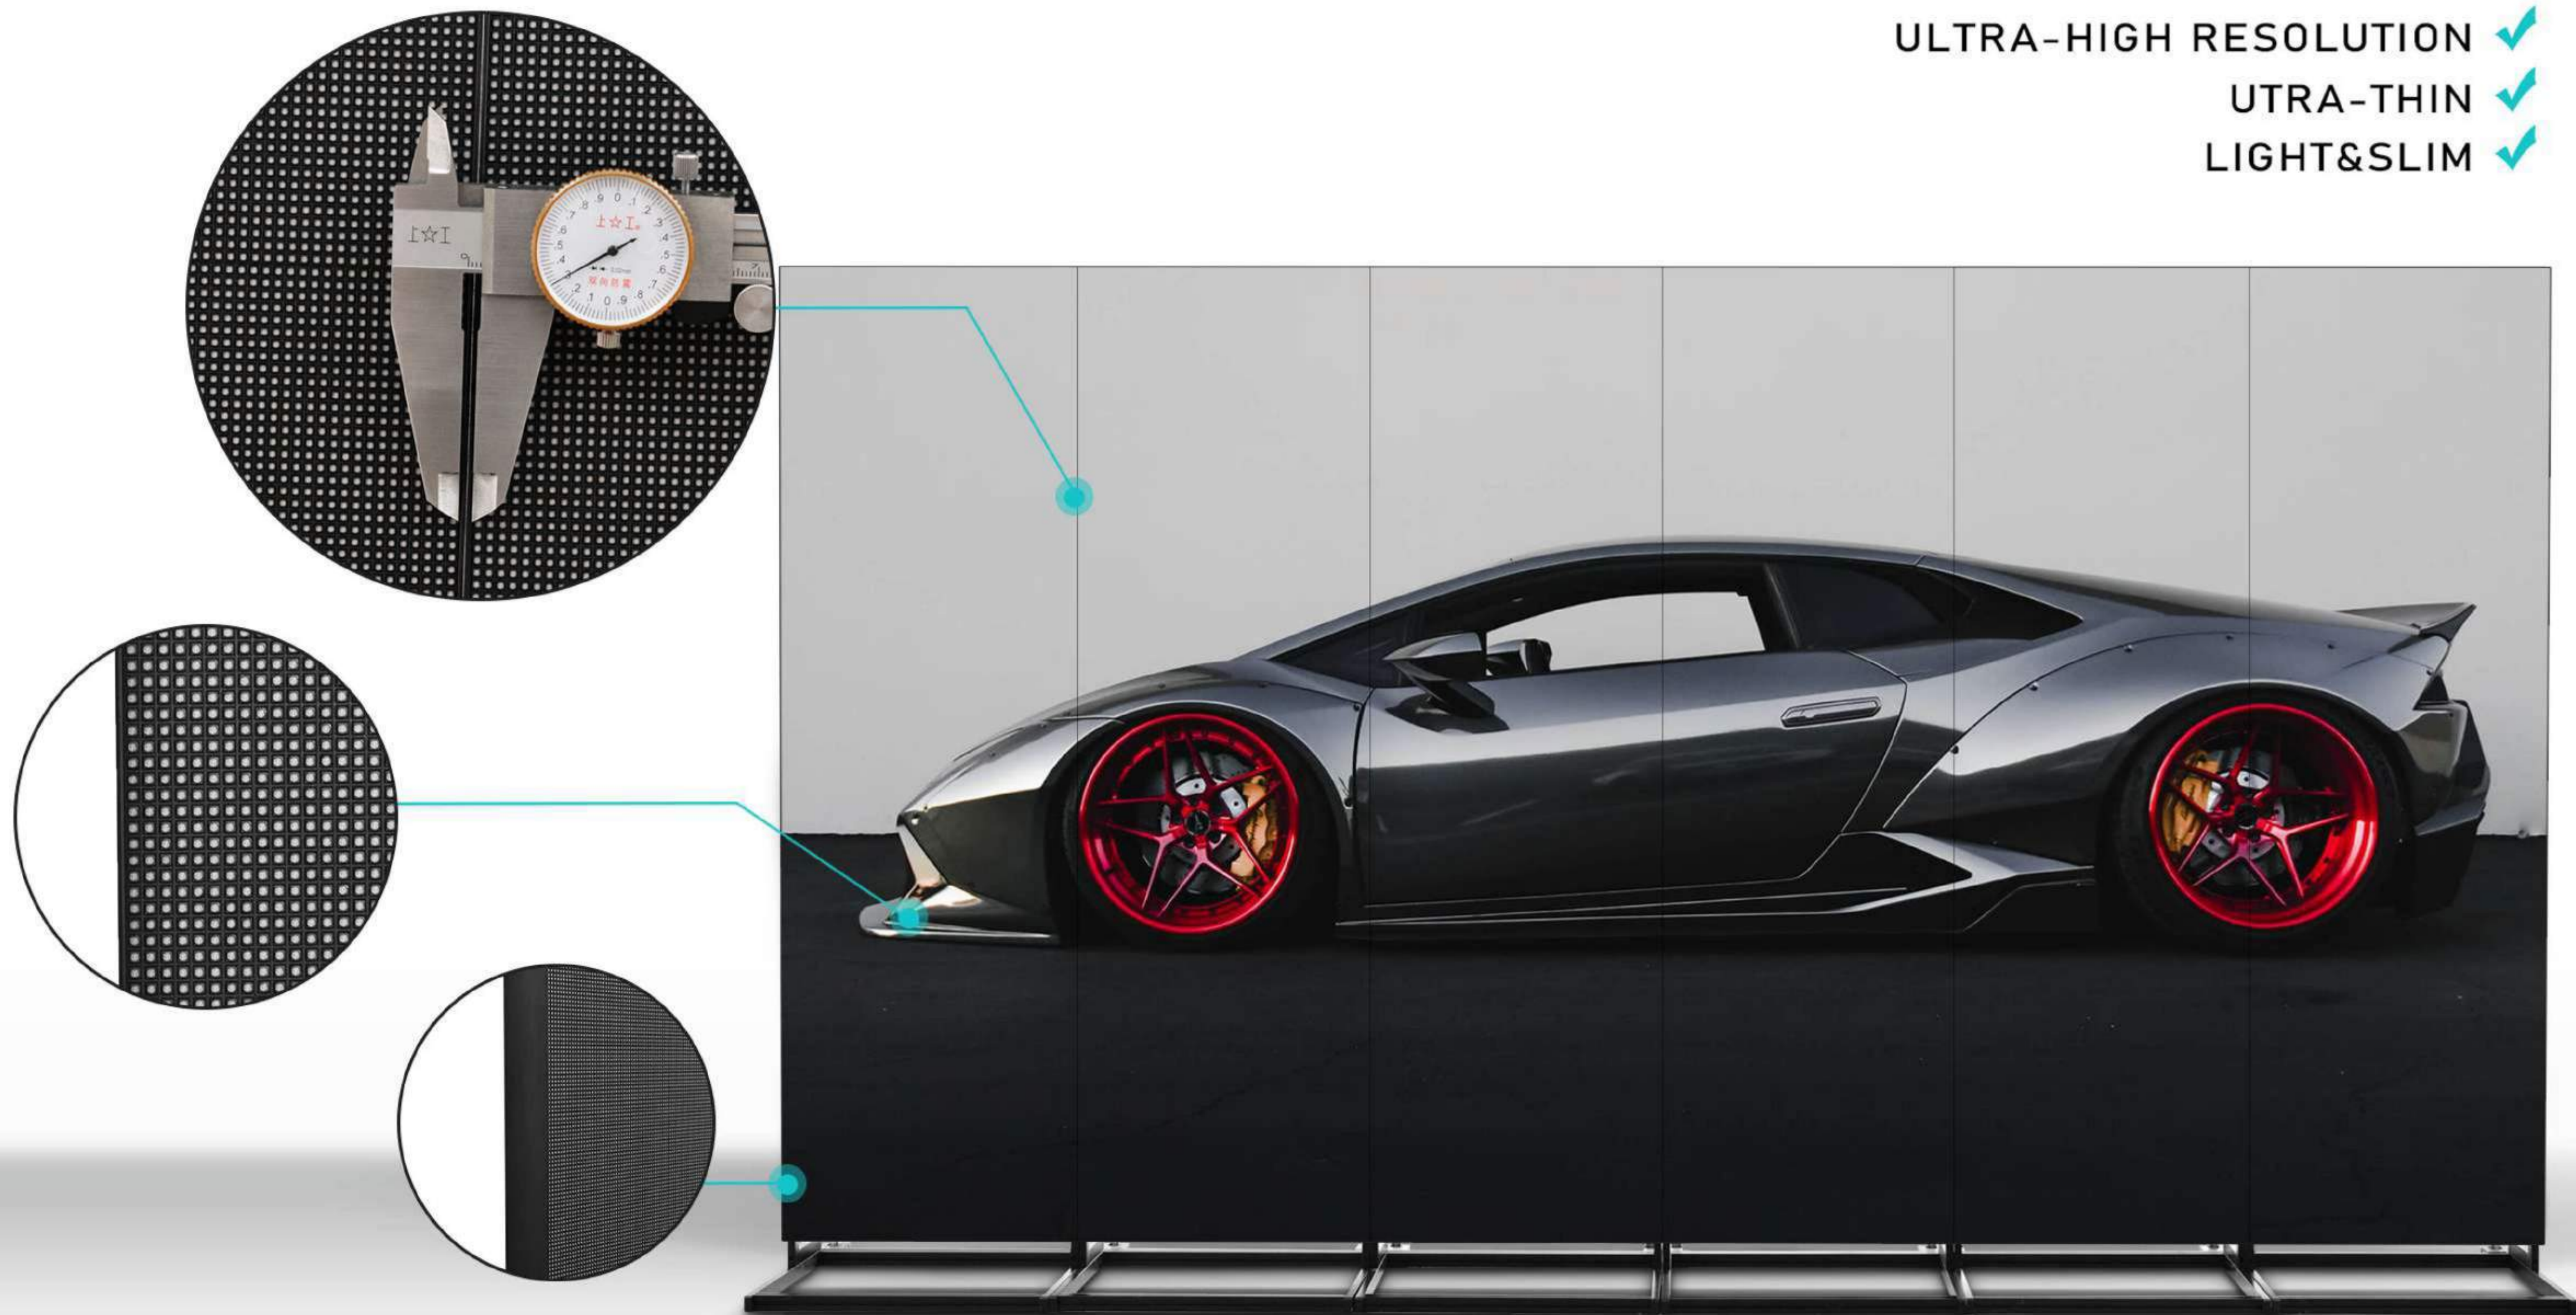


ULTRA-THIN ✓

LIGHT&SLIM ✓





# PC SERVIS | APP LICABILITY

- ✓  SHOPPING MALLS
- ✓  HOTELS
- ✓  BANK
- ✓  BARS
- ✓  STORES
- ✓  HOSPITAL
- ✓  RESTAURANTS
- ✓  SCHOOL
- ✓  EXHIBITIONS
- ✓  EVENTS
- .....



INDOOR DIGITAL LED POSTER



P3 INDOOR DIGITAL LED POSTER ▾



35kg

P2.5 IDOOR DIGITAL LED POSTER ▾



38kg

P2 INDOOR DIGITAL LED POSTER ▾



46kg



**PC SERVIS**

SERVIS IN PRODAJA RAČUNALNIŠKE OPREME

EXTERNAL DEVICE COMPATIBLE ▼



◀ BRIGHTNESS AUTOMATIC ADJUSTMENT ▶

To achieve a better advertising effect, the digital LED poster is able to connect with the speaker. Not only this, the LED poster support interactive function (customizable).





OUTDOOR DIGITAL LED DISPLAY


INDOOR DIGITAL LED DISPLAY



BRIGHTNESS




WATERPROOF

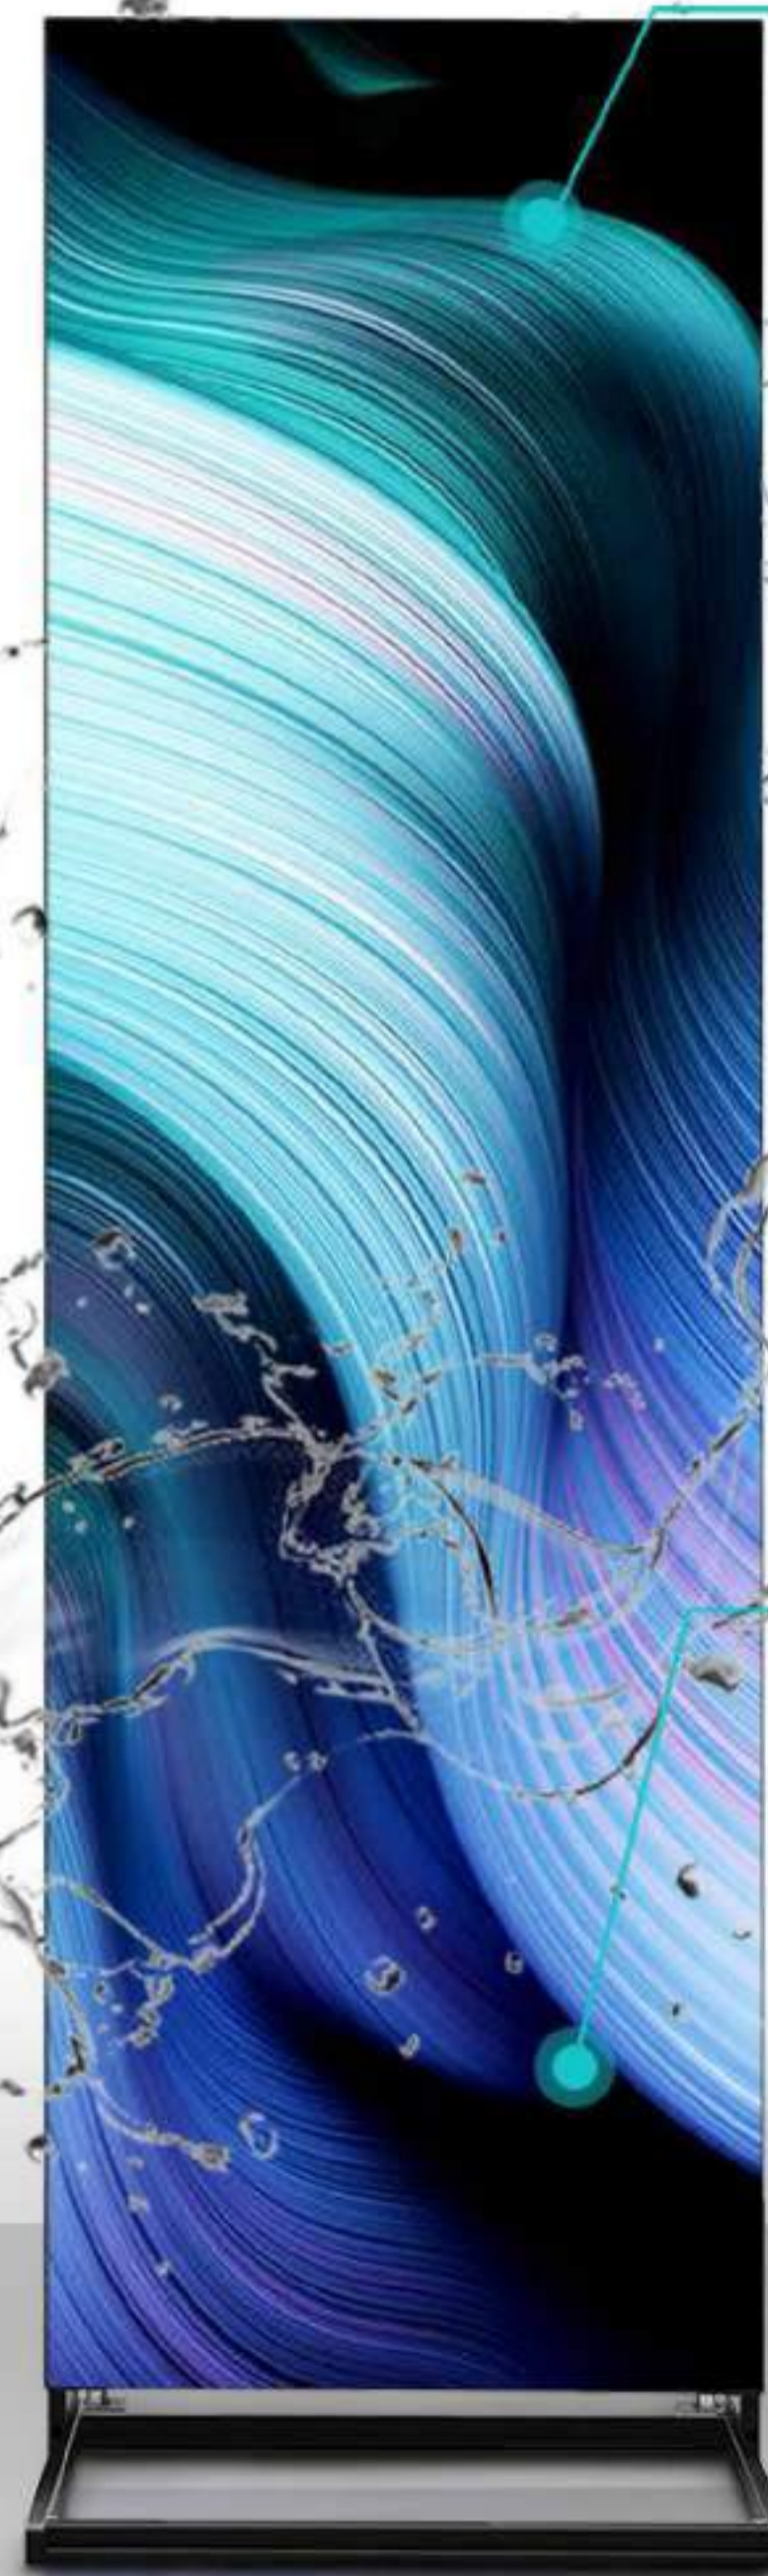




# PC SERVIS | CUSTOMIZATION SERVICE ▾

SERVIS IN PRODAJA RACUNALNIŠKE OPREME

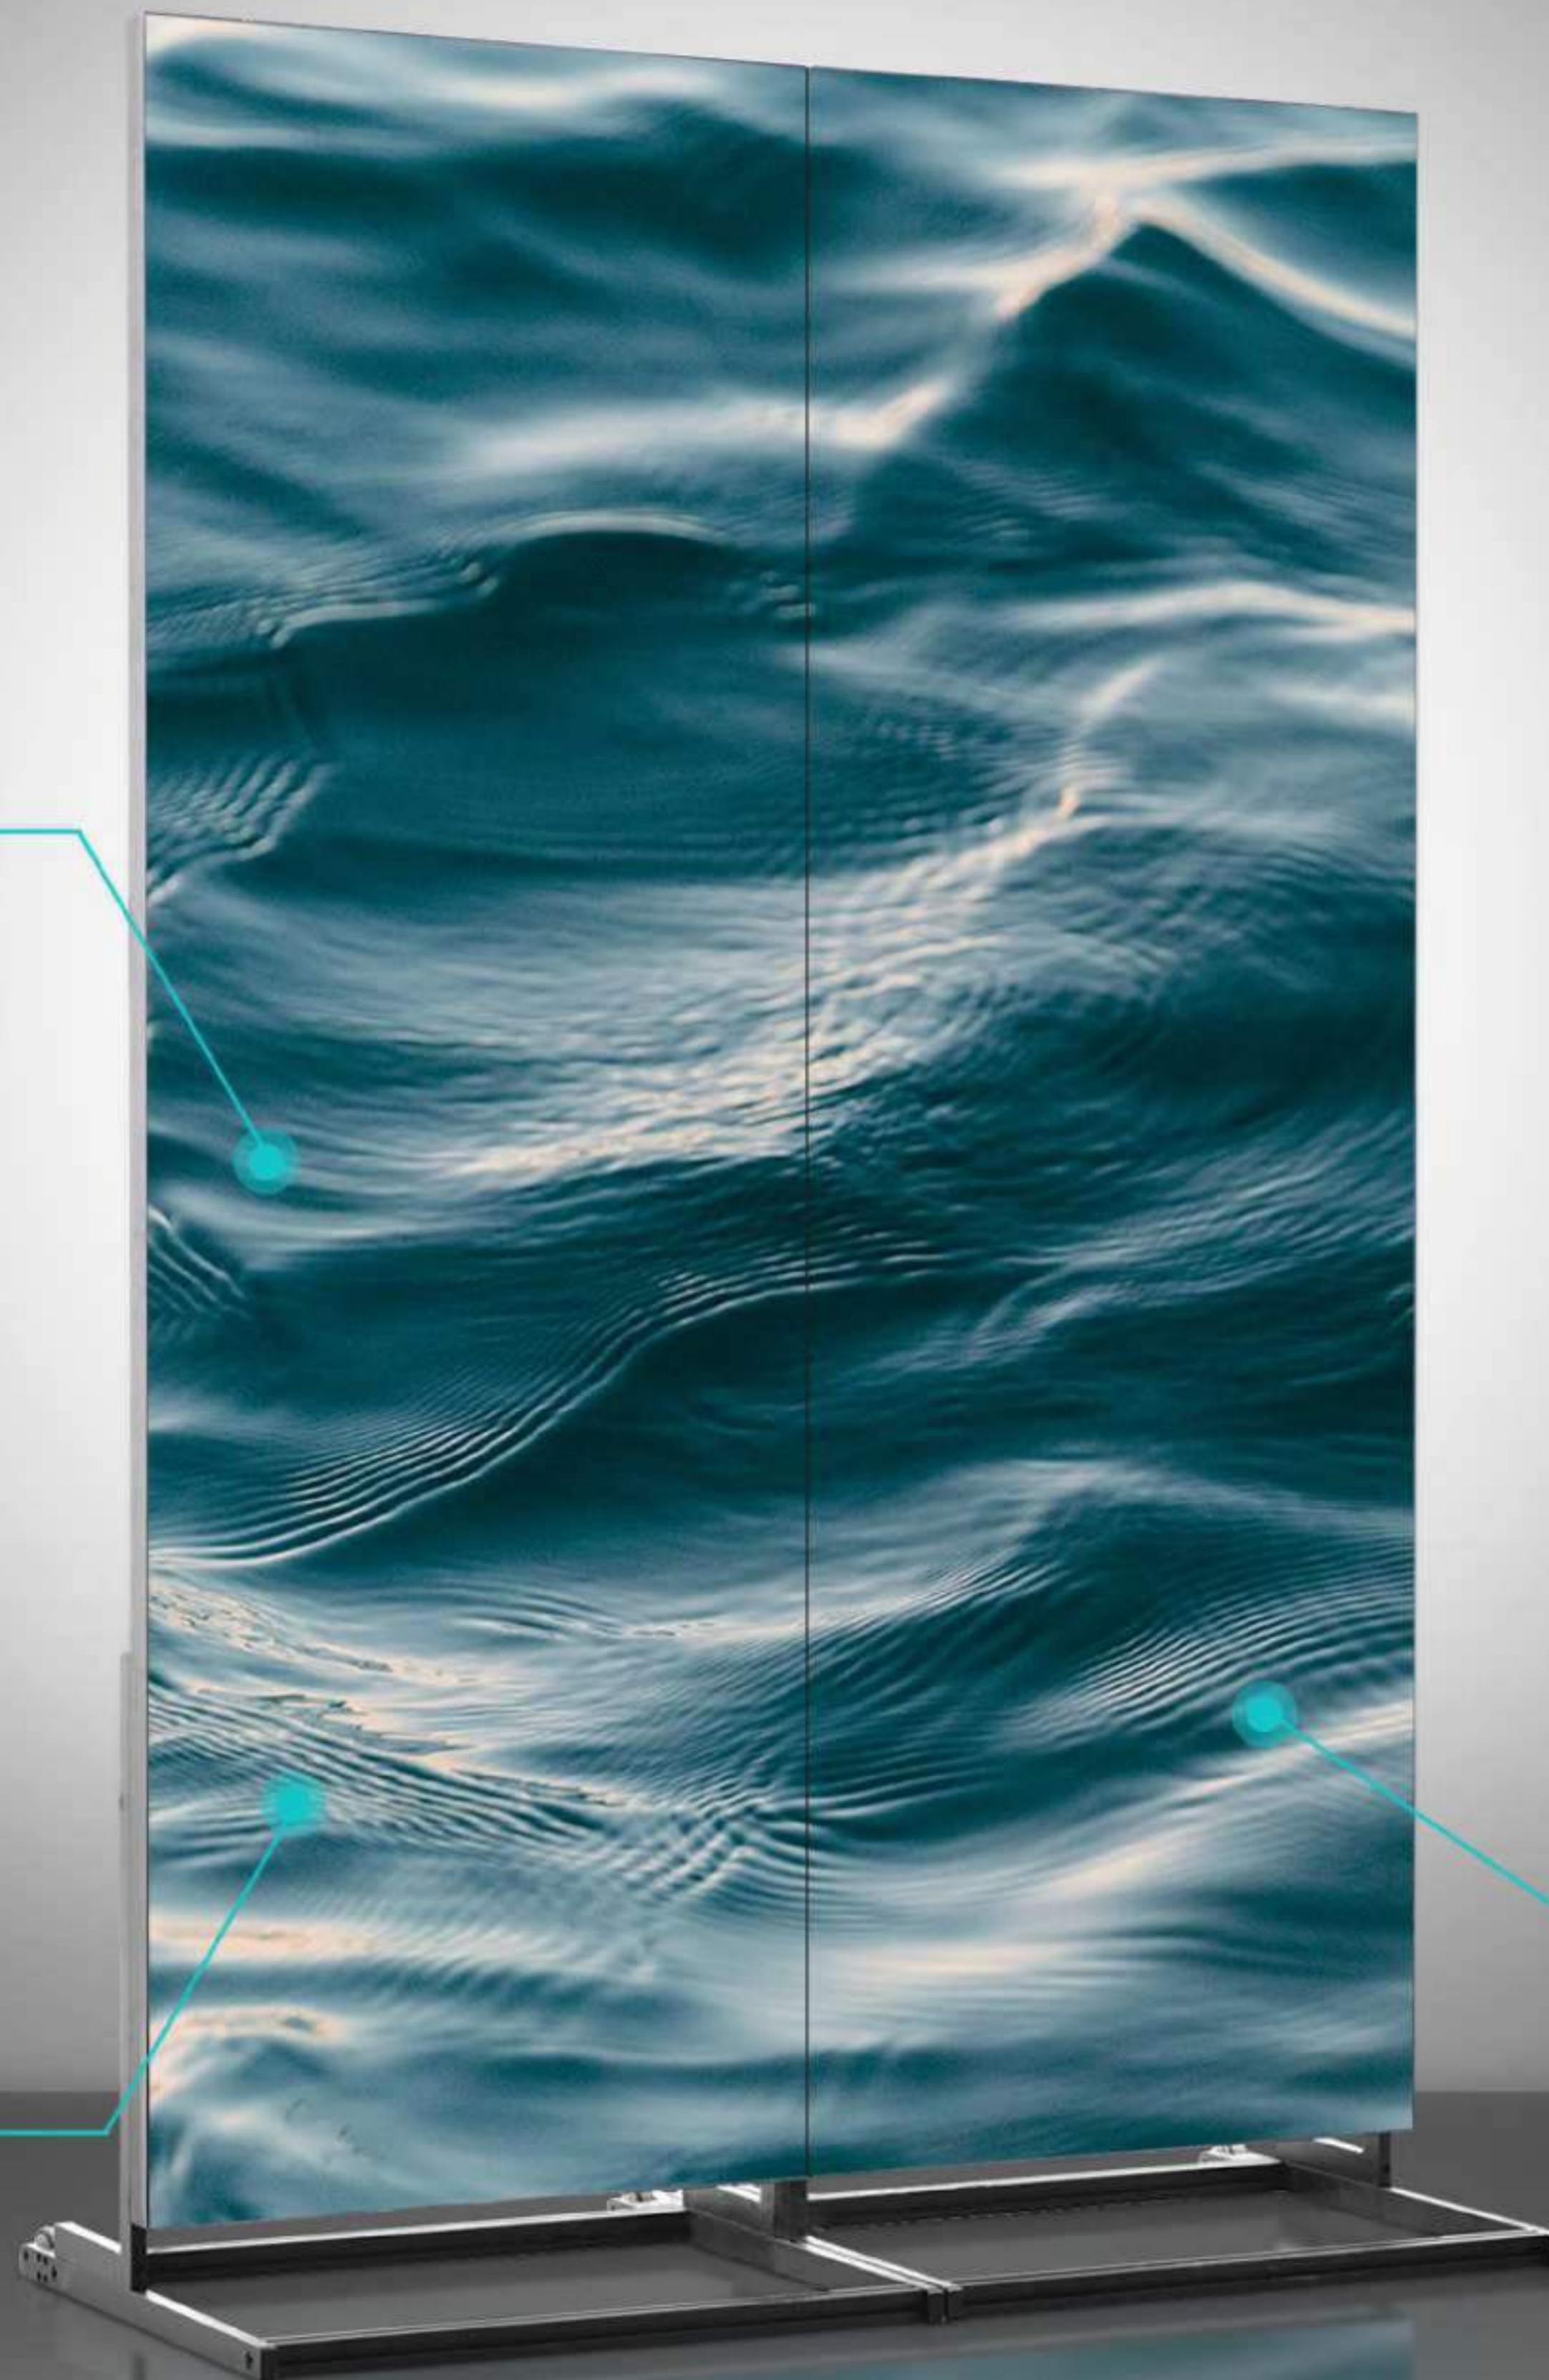

- PRINT LOGO ✓
- CUSTOM SIZE ✓
- OPERATING SYSTEM ✓

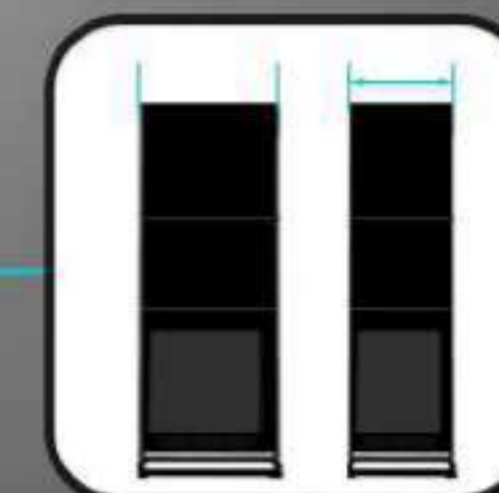



# PC SERVIS | CUSTOMIZATION SERVICE

SERVIS IN PRODAJA RAČUNALNIŠKE OPREME

Our hot-selling items are always in stock. So that customers don't have to wait for more than 10 days of production time.

We have freight forwarders that have cooperated for many years. So that when you inquire about freight, we can give the most cost-effective freight plan faster.









Model Type	PT1.9	PT2.5	PT3
Pixel pitch	1.9mm	2.5mm	3 mm
Destiny	250,000 dots /SQM	160,000 dots /SQM	111,111 dots /SQM
LED Type	SMD1515 Mat Black	SMD 2121 Mat Black	SMD 2121 Mat Black
Pixel type(R / G / B)	1R1G1B (3 in 1)	1R1G1B (3 in 1)	1R1G1B (3 in 1)
Module size	256 x 128mm	160 x 160mm	192 x 192mm
Module Resolution	128*64pixel	64*64pixel	64*64 pixel
Sreen Size (H*W)	768*1920mm	640*1920mm	576*1920mm
Feet Size	2.52 * 6.3 feet	2.10* 6.3 feet	1.88 * 6.3 feet
Screen Resolution	384 * 960 pixel	256 * 768 pixel	192 * 640 pixel
Frame Size	1930mm(H)*776mm(W)*45mm(T)	1930mm(H)*648mm(W)*45mm(T)	1930mm(H)*584mm(W)*45mm(T)
Case Material	Aluminum	Aluminum	Aluminum
Weight	46kg/ unit	38kg/ unit	35kg/ unit
Drive mode	1/32 Scan	1/32 Scan	1/16scan
Viewing Distance	≥ 2 M	≥ 2.5 M	≥ 3 M
Brightness	≥ 1,000 cd/m²	≥ 1,000 cd/m²	≥ 1,000 cd/m²
Viewing Angle	140° (H)/140°(V)	140° (H)/140°(V)	140° (H)/140°(V)
Refresh rate	≥1,920 Hz (3840HZ optional)	≥1,920 Hz (3840HZ optional)	≥1,920 Hz (3840HZ optional)
Input voltage	AC90-240V	AC90-240V	AC90-240V
Maximum Power Consumption	1170Wper unit	750Wper unit	600W per unit
Average Power Consumption	350Wper unit	220Wper unit	280W per unit
Control method:	Asynchronous(WIFI/USB/LAN/HDMI)	Asynchronous (WIFI/USB/LAN/HDMI)	Asynchronous (WIFI/USB/LAN/HDMI)
Temperature Operating (°C)	-40°~+75°	-40°~+75°	-40°~+75°
Working Humidity	10%-95%RH	10%-95%RH	10%-95%RH
IP Rating	IP20	IP20	IP20
Application	Indoor/ Semi-Outdoor	Indoor/ Semi-Outdoor	Indoor/ Semi-Outdoor
Certificate	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC